


DROP WIRE

This type of copper telecommunication wire is aimed to be used for extension to subscriber premises.

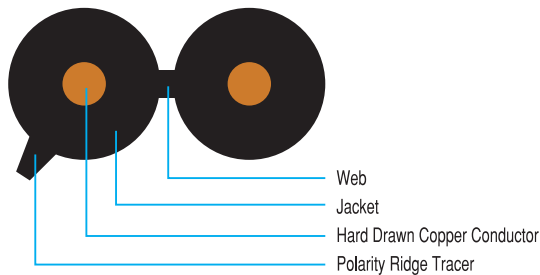

Features:

- Hard Drawn Copper Conductor
- One Raised Ridge Tracer to Identify the Polarity
- Black PE Jacketed

Specification:

Conductor Dia.: 0.8, 0.9, 1.0, 1.2 mm (18.5, 19 AWG)
 Insulation Type : HDPE
 Coil Length : 500 ± 100 m

Electrical Characteristics:

Conductor Resistance : 36.78 Ohm/km 0.8 mm
 28.96 Ohm/km 0.9 mm
 23.39 Ohm/km 1.0 mm
 Insulation Resistance : 10000 MOhm.km


Options:

- Copper Cladded Steel Wire Conductor
- Halogen Free Flame Retardant (HFFR) Insulation
- Steel Support Messenger for Aerial Applications

Standards: IEC 708 - (1-4), IEC 60332, ANSI / ICEA specification

JUMPER WIRE

This type of copper telecommunication wire is aimed to be used for cross-connections in telephone switch, cabinets and subscriber's premises.

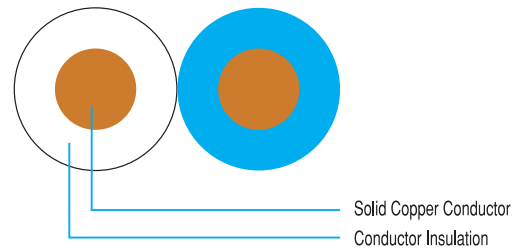

Features:

- Solid Annealed Copper Conductor
- Semi Rigid Polyvinyl Chloride (PVC) Insulated
- Each Conductor is Colored for Identification
- Twisted to Form a Pair

Specification:

Conductor Dia. : 0.5, 0.6 mm (24, 22 AWG)
 Insulation Type : PVC
 Coil Length : 500 ± 100 m

Electrical Characteristics:

Conductor Resistance: 36.78 Ohm/km 0.5 mm
 66 Ohm/km 0.6 mm
 Insulation Resistance : 200 MOhm.km

Options:

- Solid Tinned Copper Wire Conductor
- Halogen Free Flame Retardant (HFFR) Insulation
- 0.8 and 0.9 mm Conductor Diameter

Standards: IEC 708 - (1-4), IEC 60332, ANSI / ICEA specification

